

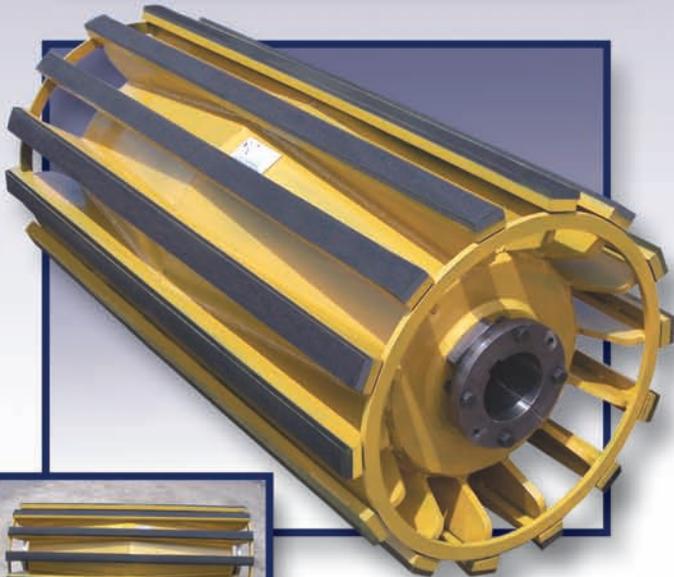


Van Gorp®
The Pulley Place

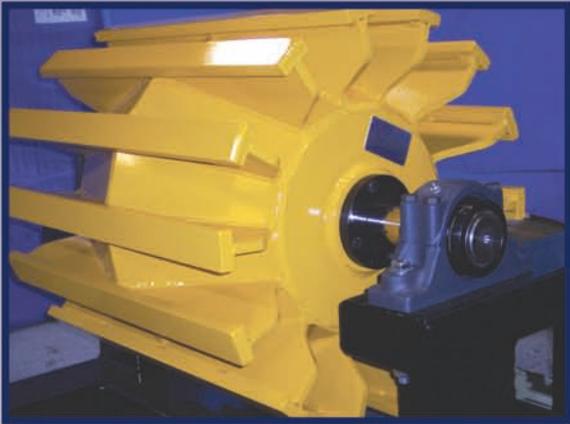

Shown with optional reinforcing rings and vulcanized lagging


Quarry Duty Wing

Van Gorp Quarry Duty Wings are designed for long life in the most rugged applications. Most wing pulleys eventually need to be replaced because of excessive contact bar wear. Van Gorp's 3/4 inch thick by 2 inch wide Quarry Duty contact bars are much thicker than necessary to meet CEMA load ratings and can add many years of life to a pulley. Longer life results in reduced down time and increased productivity (profit). The contact bars are welded to heavy duty wings that are welded to thick steel end discs. The end discs are submerged arc welded to XT hubs to give you the strongest wing pulley design possible.

Quarry Duty Wings are available in diameters ranging from 16 through 48 inches and face widths 12 to 76.

- *Designed for long life in the most rugged applications*
- *Submerged arc hub to end disc weld*
- *3/4 inch x 2 inch contact bar (Also available with optional AR bar)*
- *1/2 inch thick wings*
- *5/16 gussets*
- *Wings are approximately 5 inches tall to reduce fold over*
- *Diameters 16 through 48*

Part Number Example

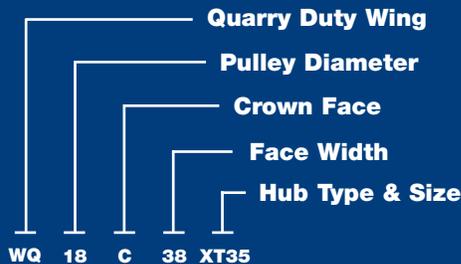

THE FINEST AND MOST
COMPLETE LINE OF
CONVEYOR PULLEYS!



Van Gorp®

The Pulley Place



XT-reme Wing With Formed Contact Bars



CEMA Class Wing With Diamond Back Lagging

Snap-Back Wing With Urethane Lagging



Contact Us To Find Out Which Van Gorp Wing Pulley Is Right For Your Application!



World Class Quality

Solution:

Problem:

Aggregate plants and most mining facilities convey abrasive materials that wear out the contact bars of wing pulleys resulting in excessive down time and lost productivity.

The proper matching of wing pulley contact bar type to the material being conveyed can add years of life to the wing pulley. Van Gorp has many different types of contact bars (some are patented) that have been developed with the user in mind. Many years of responding to our customers' needs have resulted in the following options:

- XT-reme wings with formed contact bars
- Snap-Back with urethane or rubber inserts
- Abrasion Resistant Steel contact bars
- Hard Surfaced contact bars
- Quarry Duty rated 3/4 x 2 inch flat bar
- Diamond Back replaceable lagging
- SBR Rubber vulcanized to contact bar
- Spiral Wings for constant belt contact
- Ceramic Lagged Channels

Call 1-800-VANGORP (826-4677)
For all your pulley needs!

Or email your inquiries to:

vangorp@vangorp.biz

ISO CERTIFIED FOR WORLD CLASS QUALITY

Van Gorp®

The Pulley Place

Distributed by:

